



Outer Appearance




Side Section View




Top Section View

Volume	: 160L – 500L
Capacity Range	: 13.4 kW – 28.7 kW
Maximum Operating Temperature	: 95 °C
Body Operating Pressure	: 10 Bar
Inner Surface Coating	: Tank inner surface is enamelled (glass-lined) in accordance with DIN 4753-3 standard
Insulation	: Insulation is in accordance with EN 15332 Energy Efficiency Standard
<i>160L – 500L</i>	: 42 kg/m ³ water based hard PU (HCFC-Free) foam
External Cover Coating	: Electrostatic Powder Painted Steel / Artificial Leather / IXPE / ABS
<i>160L – 500L</i>	
Thermometer	: 0°C – 120°C
Inspection and Cleaning Flange	: Inspection and cleaning flange is available in all series
Electric Heater	: Electric heater can be installed (Optional)
Cathodic Protection Element	: Magnesium anode in accordance with DIN 4753-3 standard (Electronic anode option)

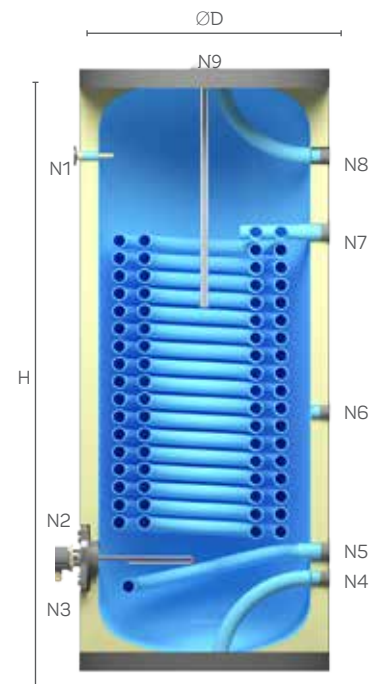

Installation Diagram

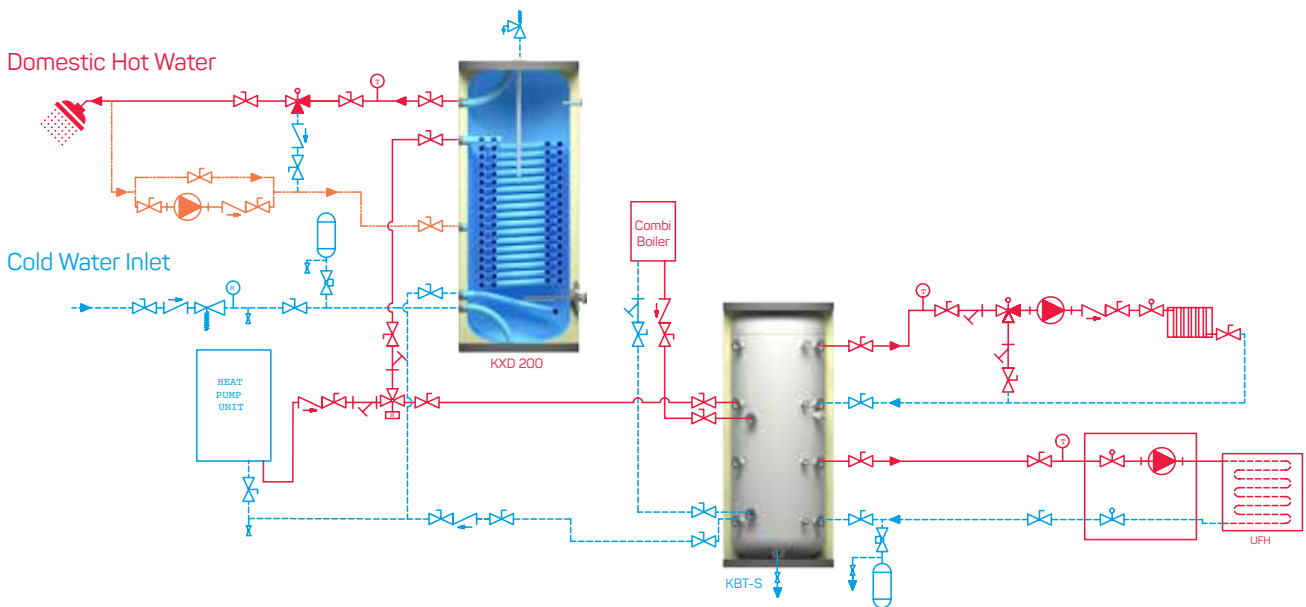

Installation diagram given above is just a template. Installation must be done according to update standards and directives.

DESCRIPTION	Code	Unit	KXD 160	KXD 200	KXD 300	KXD 500
Volume	V	L	160	200	300	500
Body Diameter	ØD	mm	590	590	700	750
Total Height	H	mm	1125	1320	1210	1800
Electric Heater	N2	inch	1 1/2"	1 1/2"	1 1/2"	1 1/2"
Cleaning Flange	N3	inch	4"	4"	4"	4"
Domestic Cold Water Inlet	N4	inch	3/4"	3/4"	1"	1"
Domestic Hot Water Outlet	N8	inch	3/4"	3/4"	1"	1"
Recirculation Diameter	N6	inch	3/4"	3/4"	1"	1"
Serpentine Diameter	N5-N7	inch	1 1/4"	1 1/4"	1 1/4"	1 1/4"
Insulation Type & Thickness	t	mm	PU/50	PU/50	PU/50	PU/50
Gross Weight	G	kg	112	137	153	237
Tipping Height		mm	1290	1465	1420	1970
Magnesium Anode Connections	N9	inch	1 1/4"	1 1/4"	1 1/4"	1 1/4"
Thermometer and Sensor Connections	N1	inch	1/2"	1/2"	1/2"	1/2"

Altek reserves the right to change technical information without notice.

Information and schemes given may not be copied and used without permission from Altek. If used, Altek does not take responsibility.